

LED SEMI CUTOFF WALL PACK

LCG-WPSC- 45W , 70W, 100W, 150W

Project Name

Notes

PRODUCT IMAGES



LCG-WPSC- 45W



LCG-WPSC- 70W



LCG-WPSC- 100W & 150W

APPLICATIONS

Litecorr LED Semi Cutoff Wall Pack Light can be widely used in indoor or outdoor lighting (wet conditions): Mechanical or electronic processing workshops, storage warehouses, steel mills, gardens, toll booth, waiting rooms, railway station platforms, indoor stadiums and flower cultivating tents, etc.

LISTINGS / CERTIFICATES

C-UL US certified to US and Canadian safety standards.



WARRANTY



FEATURES

- High luminous LED chips.
- High efficiency LED Driver w/ wide range input voltage AC100-277V and AC200-480V.
- Cast aluminum provides efficient cooling.
- Excellent Optics design.
- Photocell Control Available (Optional).

Structure Features

- Shell materials: Aluminum & polycarbonate Lens.
- Finish: Dark Bronze/White.
- Net weight: 3.5 kg (7.7 lbs).

PF	>0.95	Rated Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +40°C
CRI	Ra>80	Storage Temperature	-40 -+80°C
Lighting Angle	80°	Protection Level	Wet Location/IP65
LED Brightness Decay	<5%/6000 hrs	Cable Mount	Input Connect, No cable

SPECIFICATIONS

Ordering Information: Example: **LCG-WPSC-70W-50K**

Model #	Input Power	CCT	Rated Lumens	Voltage	Finishes	Options
LCG-WPSC	45W	[30K] 3000K	4950 lm	[U] 110-277V [H] 200-480V	[BZ] Bronze [WT] White	[P12] 120V Photocell [P27] 277V Photocell
	70W	[40K] 4000K	7200 lm			
	100W	[50K] 5000K	11000 lm			
	150W	[65K] 5000K	16000 lm			

LED SEMI CUTOFF WALL PACK


LCG-WPSC- 45W , 70W, 100W, 150W

Project Name


Notes

DIMENSIONS


LCG-WPSC- 45W

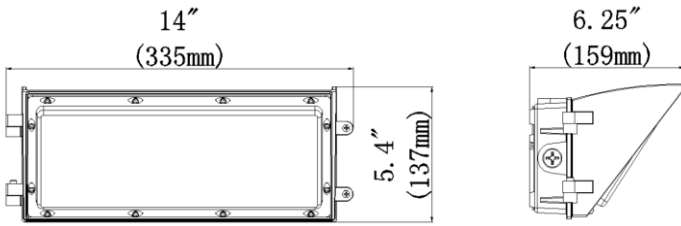

LCG-WPSC- 70W

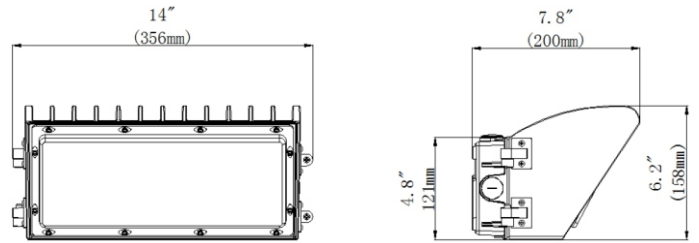

LCG-WPSC- 100W

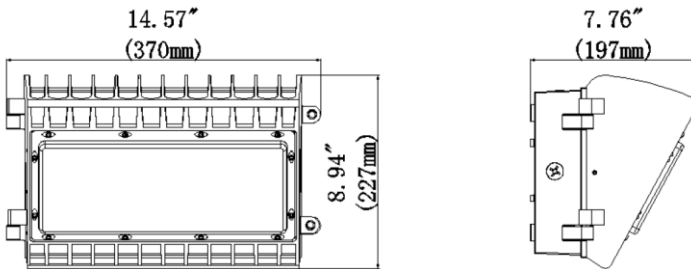

LCG-WPSC- 150W

