

LED FLOOD LIGHT

📌 **LCG-FL 45W & 70W**

PRODUCT IMAGES



WARRANTY

Five-Year Warranty


FEATURES

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, w/ wide range input voltage AC100-277V and AC200-480V.


- Cast aluminum cooling design better cooling, light quality, LED Tj < 85.
- Excellent Optics design, which greatly improves light utilization and evenness.

PF	>0.95	Rated Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
CRI	Ra>80	Storage Temperature	-40 -+80°C
Lighting Angle	80°	Protection Level	Wet Location/IP65
LED Brightness Decay	<5%/6000 hrs	Cable Mount	3 core18AWG

DIMENSIONS (KNUCKLE)

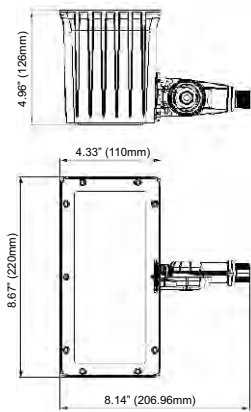

DIMENSIONS (TRUNNION)

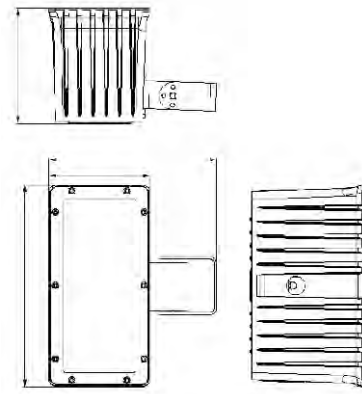

SPECIFICATIONS

Ordering Information: Example: [LCG-FL] - [45W] - [50K] - [Z] - [M]

Model #	Input Power	CCT	Rated Lumens	Voltage	Finishes	Mounting Options
LCG-FL	45W 70W	[30K] 3000K [40K] 4000K [50K] 5000K	4578 lm 6800 lm	[U] 110-277V [H] 200-480V	[BZ] Bronze [WT] White	[K] Knuckle [T] Trunnion

Project Name

Notes

APPLICATIONS

LED Flood lighting series can be widely used in indoor or outdoor applications, mechanical or electronic processing workshops, warehoused, gas stations, platforms of railway station, stadiums, etc.

LISTINGS / CERTIFICATES

