

LED LOW BAY LIGHT

➤ **LCG-LB** 90W, 120W



Project Name

Notes

LISTINGS / CERTIFICATES

C-UL US certified to US and Canadian safety standards. Damp location listed. For use in ambient operating temperatures ranging from -40°C to 40°C.



FEATURES

- Universal voltage 110-277V or high voltage 200-480V
- Dimmable / Non-dimmable
- Excellent optical design
- Shell materials: 1070 aluminum & PC


APPLICATIONS

LCG-LB LED Low Bay Light series can be widely used in indoor or damp locations like parking spaces, mechanical workshops, warehouses, gas stations, railway platforms, etc.

WARRANTY

Five-Year Warranty

PHOTOMETRIC DISTRIBUTION

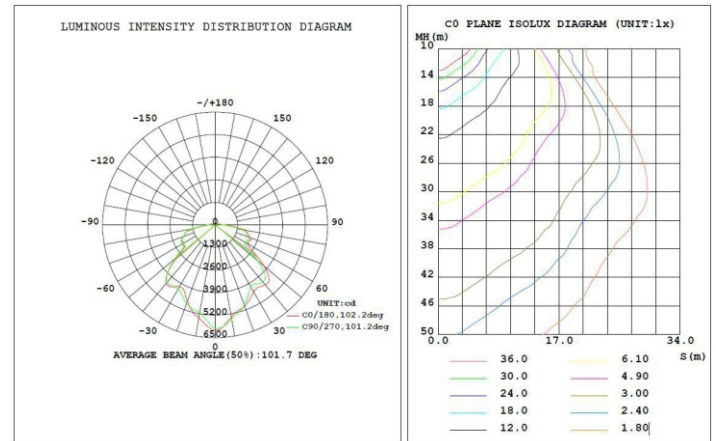

SPECIFICATIONS

Ordering Information: Example: [LCG-LB] - [90W] - [50K] - [H]

Model #	Input Power	CCT	Rated Lumens	Voltage	Finish	Option
LCG-LB	[90W] 90W [120W] 120W	[40K] 4000K [50K] 5000K	7,800 lm 10,400 lm	[U] 100-277V [H] 200-480V AC	[BK] Black [WT] White	[-] Non Dimming [D] Dimmable