

# LED SHOEBOX LIGHT

Project Name:

Notes:

## LCG-SB 60W to 300W



### FEATURES

- High efficiency LED Driver, with wide range input voltage AC120-277V or AC200-480V.
- Lumileds LED high luminous efficiency and long life.
- Working life >50,000 hrs.
- Cast aluminium design, better cooling and easy replacement, light quality, LED Tj < 85°C.
- Excellent optical design.
- Photocell Control Available (Option).
- Five-Year Warranty.

### APPLICATIONS

Litecorr LCG-SB Shoebox Lighting series can be widely used in urban roads, industrial areas, residential areas, sidewalks, parking lot, schools, gardens, etc.

### LISTINGS / CERTIFICATES


C-UL US certified to US and Canadian safety standards. Damp location listed IP65. For use in ambient operating temperatures ranging from -40°C to 40°C.

DesignLights Consortium® (DLC) qualified product: Not all versions of this product are DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.




### PHOTOMETRIC DISTRIBUTION

#### Shoobox Type 3 Distribution

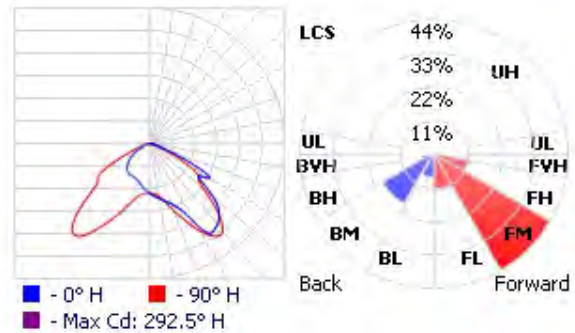

#### Shoobox Type 5 Distribution

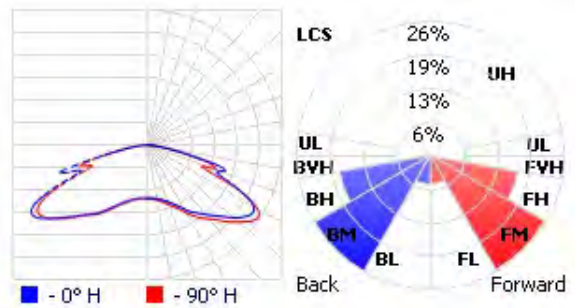

### SPECIFICATIONS

Ordering Information: Example: [LCG] - [SB] [100W] - [347] - [50K] - [T3] - [U] Represents Mounting

Model #	Input Power	Rated Lumens	Voltage	CCT	Distribution Optics	Mount	Finishes
LCG-SB	60W 100W 150W 200W 300W	7,550 lm 12,479 lm 18,670 lm 22,400 lm 36,000 lm	[U] 120-277V AC [H] 347-480V AC	[30K] 3000K [40K] 4000K [50K] 5000K [57K] 5700K	[T2] Type II [T3] Type III [T5] Type V	[S] Slip Fitter [T] Trunnion [A] Arm	[BZ] Dark Bronze [WT] White

# LED SHOEBOX LIGHT

☑ LCG-SB 60W to 300W

Project Name:

Notes:

